

TECHNICAL DATA SHEET No. 25

Reece Safety Products Ltd

Unit B9, Lowfields Close, Lowfields Business Park, Elland, West Yorkshire HX5 9DX

Tel: 01422 310456 Fax: 01422 311070 Email sales@reecesafety.co.uk www.reecesafety.co.uk



Product Information and Assembly Instructions - Domestic Circuit Breaker Lockout Kit DCBKIT

Locates prongs from inside


CB05

Push button operated, the model CB05 fits most popular breakers up to 60 Amp. Will also fit multi-pole breakers.

- 1 Push the button to release the prongs
- 2 Hold in position and place the two prongs into the two locating holes either side of the circuit breaker switch.
- 3 Lock in place using a padlock



Remember, the breaker must be in the "off" position before installing

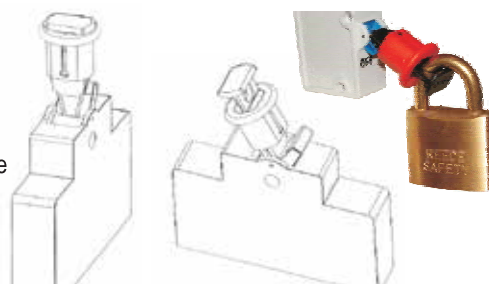

CB09

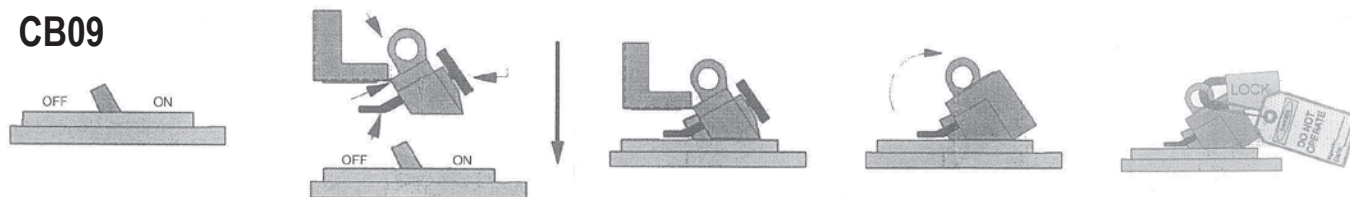


Figure 1

Figure 2


Figure 3

Figure 4

Figure 5

Thumb wheel operation, model CB09, "No hole" circuit breaker ideal for breakers without built in locking facility.

- 1 Place circuit breaker in the OFF position (figure 1)
- 2 Place the lockout component over the circuit breaker switch tongue as shown (figure 2). Rotate thumb wheel anti-clockwise to release the locking clamp if necessary
- 3 Rotate thumbwheel clockwise to secure the lockout device to the circuit breaker switch tongue (Figure 3)
- 4 Flip the cover over the lockout, blocking access to the thumb wheel (Figure 4)
- 5 Verify that the circuit breaker tongue switch is securely fastened and cannot be switched on
- 6 Lock in position with a padlock or lockout hasp and attach safety tag as required (Figure 5)

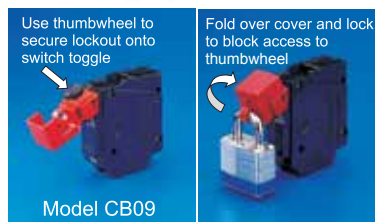

Model CB09

CB12 / UCL1 toggle lock



The CB12/UCL1 can be used to lock breakers which have no locking facilities.



- 1 Place circuit breaker in the OFF position (figure 1)
- 2 Place the CB12/UCL1 over the circuit breaker toggle as shown (figure 2).
- 3 Using a small screwdriver, tighten the internal grub screw securing the CB12/UCL1 onto the toggle (figure 3)
- 4 Place a lockout padlock through the hole as shown (figure 4).
- 5 Verify that the circuit breaker toggle is securely fastened and cannot be switched on (figure 5).




CB13

- 1 Move breaker to off position. Open red handle.



2. Place CB13 sideways over the breaker toggle. Turn black knob clockwise until grips touch toggle. Do not over tighten. When the handle is closed the grips will tighten against the toggle.



3. Move lockout handle to closed position. Check that lockout is secure and breaker can not be moved to "on" position. Apply padlock.

CB16

- 1 Switch the breaker to the off position and place the CB16 over the switch as shown. Using the toggle, tighten the screw clamping the CB16 onto the switch.
- 2 Rotate the toggle as shown
- 3 Place a padlock through the locking hole preventing the toggle from operating



1 Tighten set screw



2 Rotate toggle



3 Lockout/Tagout