

TECHNICAL DATA SHEET No. 12

Reece Safety Products Ltd

Unit B9, Lowfields Close, Lowfields Business Park, Elland, West Yorkshire HX5 9DX

Tel: 01422 310456 Fax: 01422 311070 Email sales@reecesafety.co.uk www.reecesafety.co.uk




Product Information and Assembly Instructions - Lock-a-Plug LP110 & LP550


LP110

For plug from 110 volts


- 1 Insert the plug
- 2 Close the cover of the box and slide it laterally.
- 3 Put on your padlock

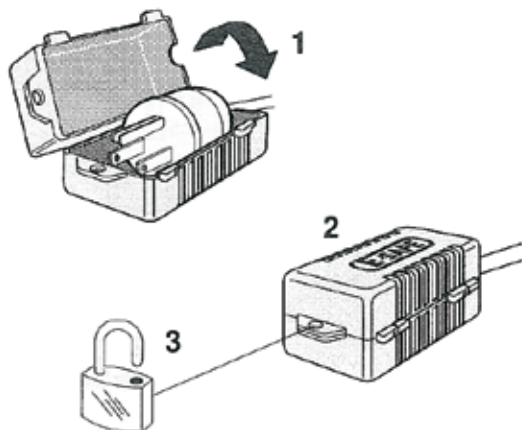

LP550

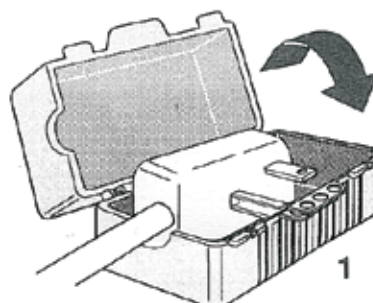

For plug
From 240 to 600 volts
With multiple lock-out

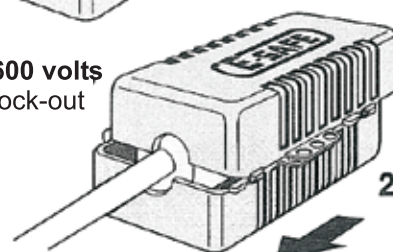

- 1 Insert to plug into the box.
- 2 Close the cover of the box and slide it laterally
- 3 Put on your padlock

Product Information and Assembly Instructions - Industrial Plug Lockout LP220 & LP660

- 1 Open lockout device and place plug as shown inside device.
- 2 Close, then slide lockout device to closed position. Align the lock holes.
- 3 Place one or more padlock(s) through the lock holes provided. Lock holes accept padlock shackles of up to 9.5mm diameter. Attach identification tag through indicated holes provided
- 4 After completing the above steps, test that locked out plug cannot be pulled from lockout device.

NOTE.

For optional location storage, open lockout device, remove plug and place lockout device on cable. Close device and slide to closed position.



WARNING: Optional storage position is NOT a lockout condition.

